

THREE PHASE DIODE MODULE


Features

1. NK3D100..(R) series Diode modules are designed for 3 phase rectification
2. Voltage rating up to 1600V
3. High surge capability


Ordering code

NK3D	100	/	06	(R)
(1)	(2)	(3)	(4)	


- (1) For Three Phase Diode modules
 (2) Maximum average forward current, A
 (3) Voltage code, V (code x 10 = V_{RRM})
 (4) Blank - for common cathode to base plate
 R- for common anode to base plate



NK3D



NK3D..(R)

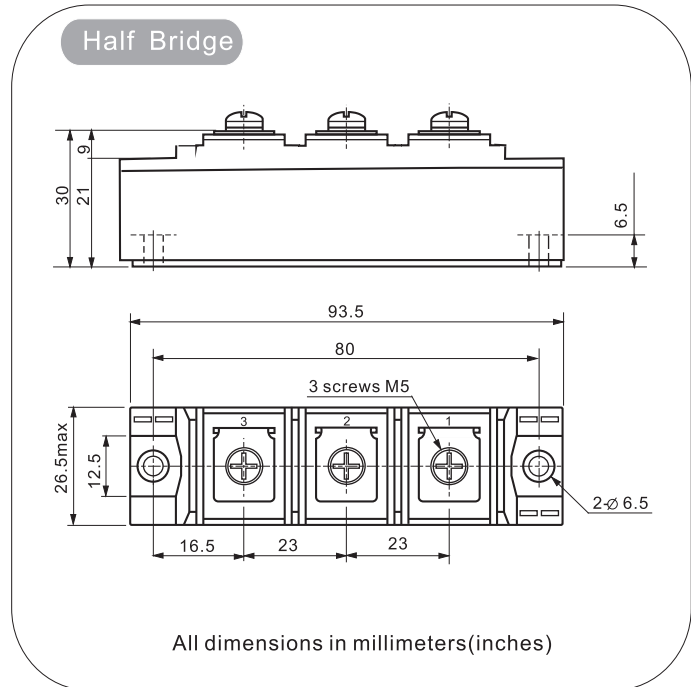

Electrical Characteristics

Parameter		Condition	Max. Value	Unit
I _{F(AV)}	Average forward current	180° half sine wave , 50 Hz Single side cooled , T _C =115 °C	100	A
I _{F(RMS)}	R.M.S. Forward current	Single side cooled , T _C =115 °C	158	A
V _{RRM}	Repetitive peak reverse voltage	t _p =10 ms V _{RMS} = V _{RRM} x 1.1	200 to 1600	V
I _{RRM}	Repetitive peak reverse current	V _R = V _{RRM}	12	mA
I _{FSM}	Peak one-cycle surge (non-repetitive forward current)	10 ms duration V _R = 0.6 V _{RRM}	2000	A
I _t ²	Max. Permissible surge energy		11.6	KA ² S
V _{FM}	Peak forward voltage drop	I _{FM} = 180A	1.6	V
V _{FO}	Forward conduction threshold voltage		0.8	V
r _f	Forward conduction slope resistance		2.13	mΩ
T _{stg}	Storage temperature range		-40 to 150	°C
R _{th(J-C)}	Thermal resistance	Single side cooled	0.38	°C/ W
W _t	Approximate weight		340	g
T	Busbar to module (M 5)	A mounting compound is recommended. Torque should be rechecked after a period of 3 hours.	2.7	NM
	Module to heatsink (M 6)		2.7	NM

Fig.1

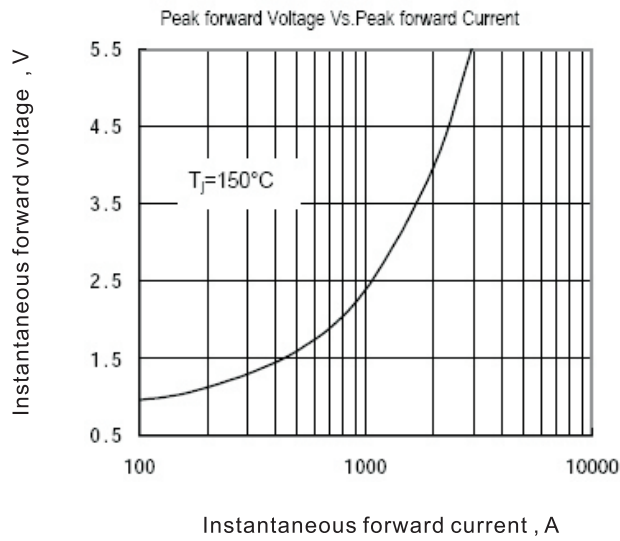


Fig.2

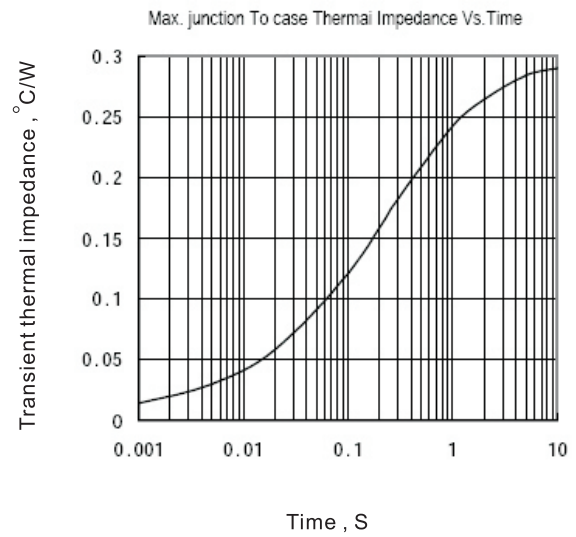


Fig.3

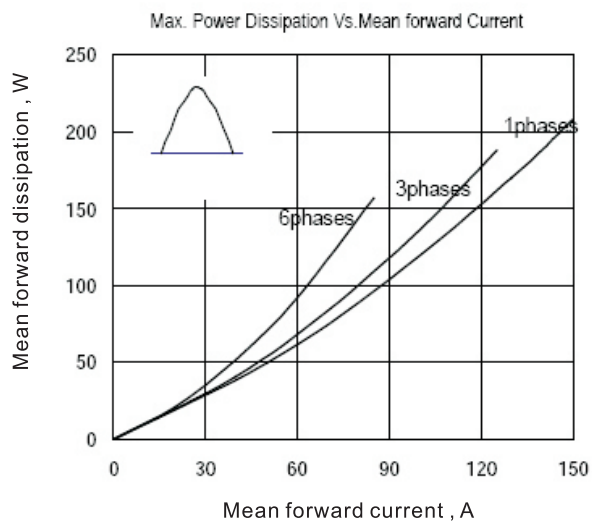


Fig.4

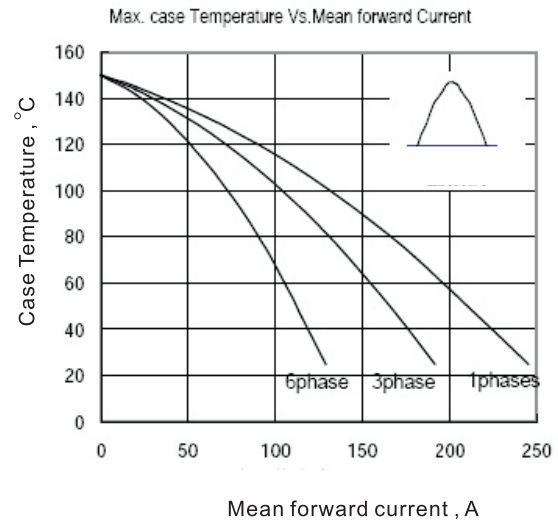


Fig.5

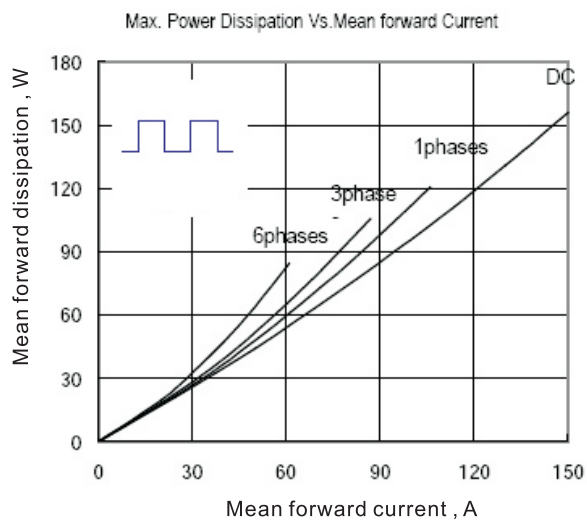


Fig.6

