

## FRED Ultrafast Soft Recovery Diode Module 100A x 2 / 600V

### FEATURES


- Very low  $Q_{rr}$  and  $t_{rr}$
- Lead (Pb)-free
- Designed and qualified for industrial level
- Reduced RFI and EMI
- Reduced snubbing
- Planar FRED Chip
- Epoxy molding structure

### DESCRIPTION

FRED diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems .  
An extensive characterization of the recovery behavior for different values of current, temperature and  $dI/dt$  simplifies the calculations of losses in the operating conditions. The softness of the recovery eliminates the need for a snubber in most applications.

### TYPICAL APPLICATIONS

- Power converters
- Motor drives
- Welders
- Switching power supplies
- Uninterruptible power supply (UPS)
- Power factor correction (PFC) circuit
- Inverter
- Choppers
- Battery chargers

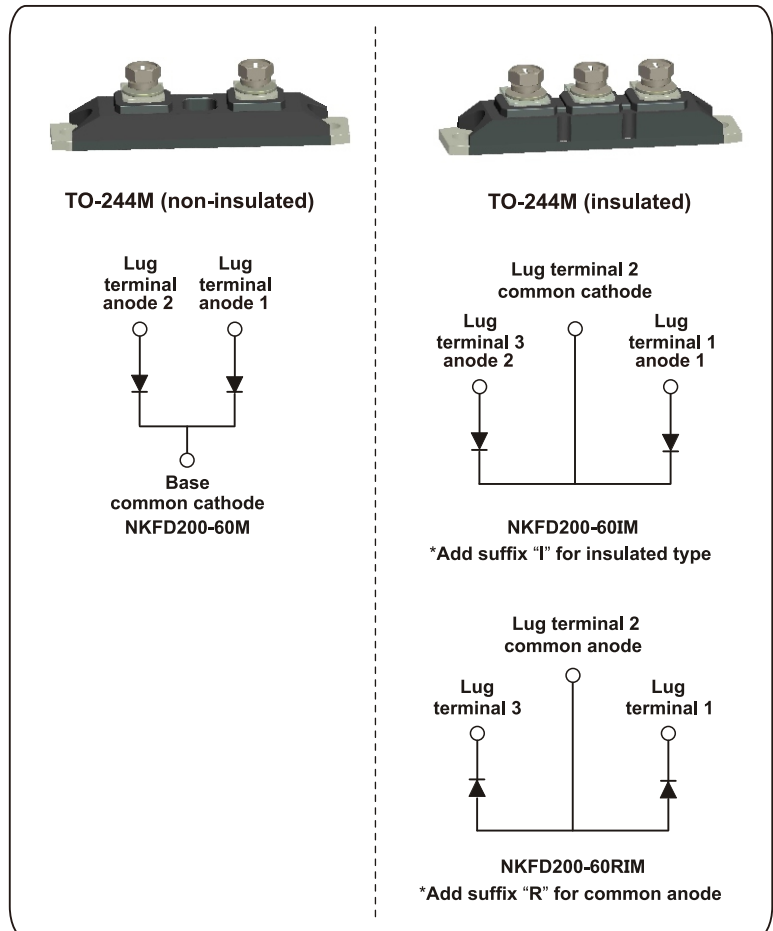

### PRODUCT SUMMARY

|                      |                |
|----------------------|----------------|
| $I_{F(AV)}$          | 200A           |
| $V_R$                | 600V           |
| $I_{F(DC)}$ at $T_C$ | 120A at 100 °C |

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                                        | SYMBOL         | TEST CONDITIONS                                             | MAX.        | UNIT |
|--------------------------------------------------|----------------|-------------------------------------------------------------|-------------|------|
| Cathode to anode voltage                         | $V_R$          |                                                             | 600         | V    |
| Average forward current                          | $I_{F(AV)}$    | $T_C = 25^\circ\text{C}$ , per leg                          | 235         | A    |
|                                                  |                | $T_C = 115^\circ\text{C}$ per device                        | 200         |      |
|                                                  |                | $T_C = 115^\circ\text{C}$ per leg                           | 100         |      |
| Single pulse forward current                     | $I_{FSM}$      | Limited by junction temperature, per leg                    | 1300        |      |
| Non-repetitive avalanche energy                  | $E_{AS}$       | $L = 100 \mu\text{H}$ , duty cycle limited by maximum $T_J$ | 2.2         | mJ   |
| Maximum power dissipation                        | $P_D$          | $T_C = 25^\circ\text{C}$                                    | 317         | W    |
|                                                  |                | $T_C = 100^\circ\text{C}$                                   | 144         |      |
| Operating junction and storage temperature range | $T_J, T_{Stg}$ |                                                             | - 55 to 150 | °C   |

## Nell High Power Products

### ELECTRICAL SPECIFICATIONS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

| PARAMETER                                           | SYMBOL    | TEST CONDITIONS                                | MIN. | TYP. | MAX.                   | UNIT          |
|-----------------------------------------------------|-----------|------------------------------------------------|------|------|------------------------|---------------|
| Cathode to anode breakdown voltage                  | $V_{BR}$  | $I_R = 100\ \mu\text{A}$                       | 600  | -    | -                      | V             |
| Maximum forward voltage                             | $V_{FM}$  | $I_F = 100\ \text{A}$                          | -    | 1.20 | 1.35                   |               |
|                                                     |           | $I_F = 200\ \text{A}$                          | -    | 1.35 | 1.50                   |               |
|                                                     |           | $I_F = 100\ \text{A}, T_J = 125^\circ\text{C}$ | -    | 1.0  | 1.15                   |               |
| Maximum reverse leakage current per leg             | $I_{RM}$  | $T_J = 125^\circ\text{C}, V_R = 600\text{V}$   | -    | 1.0  | 4                      | mA            |
|                                                     |           | $T_J = 25^\circ\text{C}, V_R = 600\text{V}$    | -    | 2.0  | 10                     | $\mu\text{A}$ |
| Junction capacitance                                | $C_T$     | $V_R = 200\text{V}$                            | -    | 200  | 300                    | pF            |
| Series inductance                                   | $L_S$     | From top of terminal hole to mounting plane    | -    | 6.0  | -                      | nH            |
| Maximum RMS insulation voltage (for insulated type) | $V_{INS}$ | 50Hz                                           | -    | -    | 2500(1min)<br>3000(1s) | V             |

### DYNAMIC RECOVERY CHARACTERISTICS PER LEG ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

| PARAMETER                     | SYMBOL           | TEST CONDITIONS                                                          | MIN. | TYP. | MAX. | UNIT             |
|-------------------------------|------------------|--------------------------------------------------------------------------|------|------|------|------------------|
| Reverse recovery time         | $t_{rr}$         | $I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{RR} = 0.25\text{A}$            | -    | 80   | 90   | ns               |
|                               |                  | $I_F = 1.0\text{A}, dI_F/dt = 200\text{A}/\mu\text{s}, V_R = 30\text{V}$ | -    | 70   | -    |                  |
|                               |                  | $T_J = 25^\circ\text{C}$                                                 | -    | 90   | 140  |                  |
|                               |                  | $T_J = 125^\circ\text{C}$                                                | -    | 160  | 240  |                  |
| Peak recovery current         | $I_{RRM}$        | $T_J = 25^\circ\text{C}$                                                 | -    | 10   | 18   | A                |
|                               |                  | $T_J = 125^\circ\text{C}$                                                | -    | 15   | 30   |                  |
| Reverse recovery charge       | $Q_{rr}$         | $T_J = 25^\circ\text{C}$                                                 | -    | 450  | 1300 | nC               |
|                               |                  | $T_J = 125^\circ\text{C}$                                                | -    | 1200 | 3600 |                  |
| Peak rate of recovery current | $dI_{(rec)M}/dt$ | $T_J = 25^\circ\text{C}$                                                 | -    | 310  | -    | A/ $\mu\text{s}$ |
|                               |                  | $T_J = 125^\circ\text{C}$                                                | -    | 240  | -    |                  |

### THERMAL AND MECHANICAL SPECIFICATIONS

| PARAMETER                                       | SYMBOL                  | MIN.     | TYP.      | MAX.     | UNIT                      |
|-------------------------------------------------|-------------------------|----------|-----------|----------|---------------------------|
| Maximum junction and storage temperature range  | $T_J, T_{stg}$          | -55      | -         | 150      | $^\circ\text{C}$          |
| Thermal resistance, junction to case per leg    | TO-244M (non-insulated) | -        | -         | 0.30     | $^\circ\text{C}/\text{W}$ |
|                                                 | TO-244M (insulated)     | -        | -         | 0.42     |                           |
| Thermal resistance, junction to case per module | TO-244M (non-insulated) | -        | -         | 0.15     |                           |
|                                                 | TO-244M (insulated)     | -        | -         | 0.21     |                           |
| Typical thermal resistance, case to heatsink    | $R_{thCS}$              | -        | 0.10      | -        |                           |
| Weight                                          | TO-244M (non-insulated) | -        | 80 (2.82) | -        | g (oz.)                   |
|                                                 | TO-244M (insulated)     | -        | 95 (3.36) | -        |                           |
| Mounting torque <sup>(1)</sup>                  |                         | 30 (3.4) | -         | 40 (4.6) | lbf·in<br>(N·m)           |
| Mounting torque center hole                     |                         | 12 (1.4) | -         | 18 (2.1) |                           |
| Terminal torque                                 |                         | 30 (3.4) | -         | 40 (4.6) |                           |
| Vertical pull                                   |                         | -        | -         | 80       | lbf·in                    |
| 2" lever pull                                   |                         | -        | -         | 35       |                           |

Note

(1) Mounting surface must be smooth, flat, free of burrs or other protrusions. Apply a thin even film of thermal grease to mounting surface.


Gradually tighten each mounting bolt in 5 to 10 lbf. in steps until desired or maximum torque limits are reached

### Ordering Information Table


| Device code | NK | F | D | 200 | — | 60 | R | I | M |
|-------------|----|---|---|-----|---|----|---|---|---|
|             | 1  | 2 | 3 | 4   |   | 5  | 6 | 7 | 8 |

- 1** - Nell's power module
- 2** - F for Ultrafast soft recovery diode
- 3** - D for Dual Diodes, TO-244 Package
- 4** - Maximum average forward current, 200 = 100A x 2
- 5** - Voltage rating (60 = 600V)
- 6** - None for common cathode configuration  
"R" for common anode configuration
- 7** - None for non-insulated type  
"I" for insulated type
- 8** - M for Molding structure


**Fig.1 Maximum forward voltage drop vs. Instantaneous forward current (per leg)**

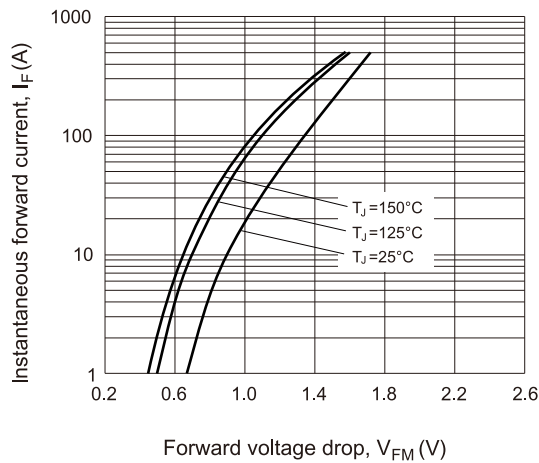


**Fig.2 Typical reverse current vs. reverse voltage (per leg)**

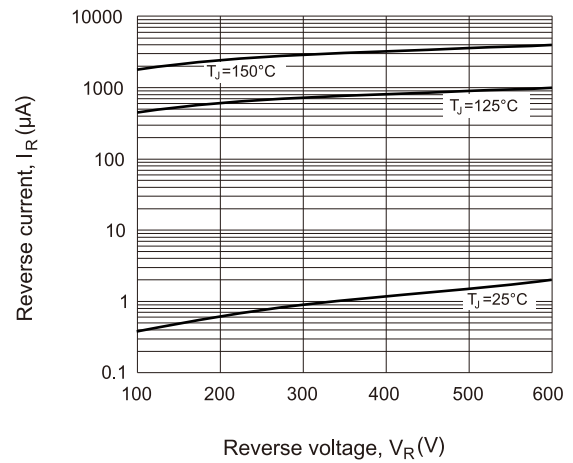

**Fig.3 Typical junction capacitance vs. reverse voltage (per leg)**

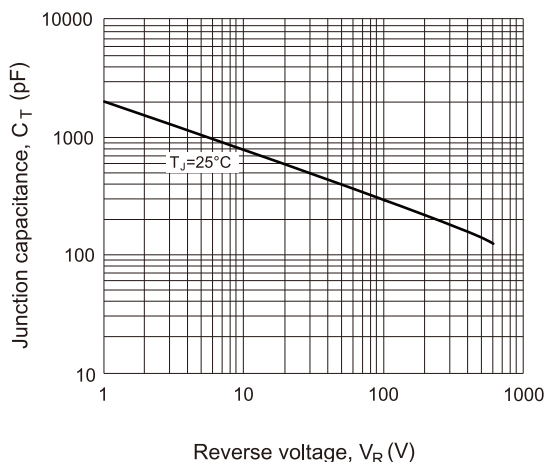


**Fig.4 Maximum allowable case temperature vs. DC forward current (per leg)**

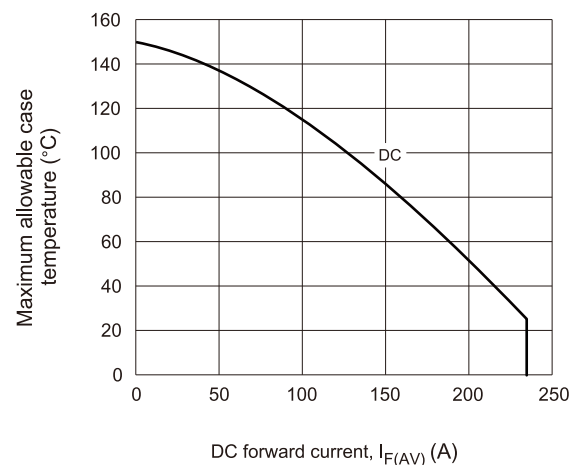


## Nell High Power Products


**Fig.5 Typical reverse recovery time vs.  $dl_F/dt$  (per leg)**

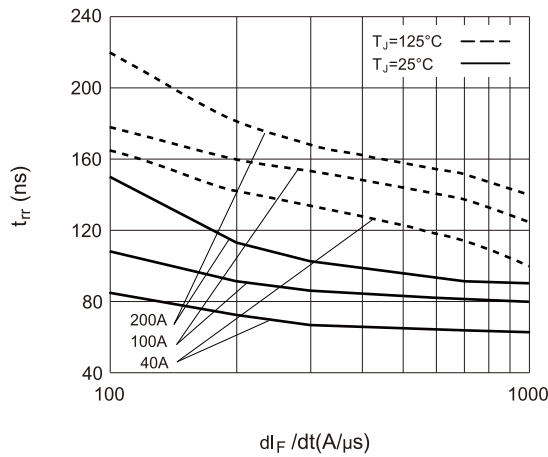


**Fig.6 Typical recovery current vs.  $dl_F/dt$  (per leg)**

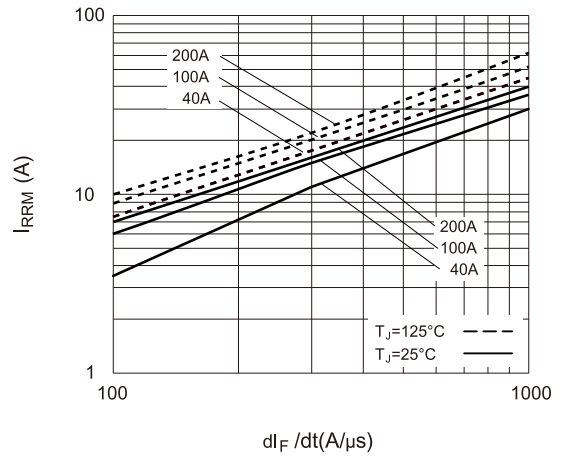


**Fig.7 Typical stored charge vs.  $dl_F/dt$  (per leg)**

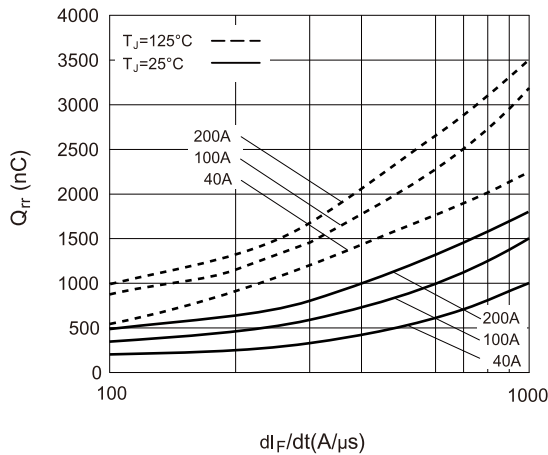


**Fig.8 Typical  $dl_{(rec)M}/dt$  vs.  $dl_F/dt$  (per leg)**

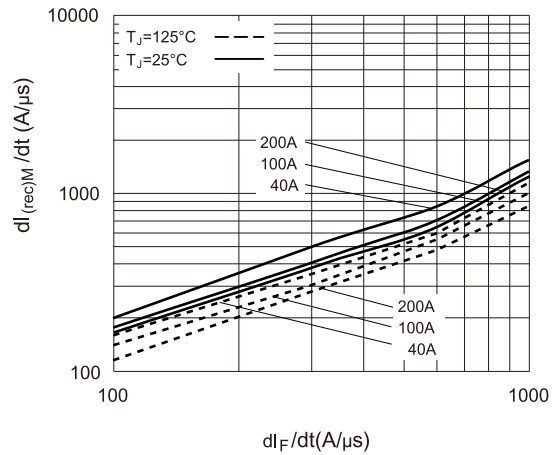


**Fig.9-1 Maximum thermal impedance  $R_{th(j-c)}$  characteristics (per leg, for TO-244M non-insulated)**

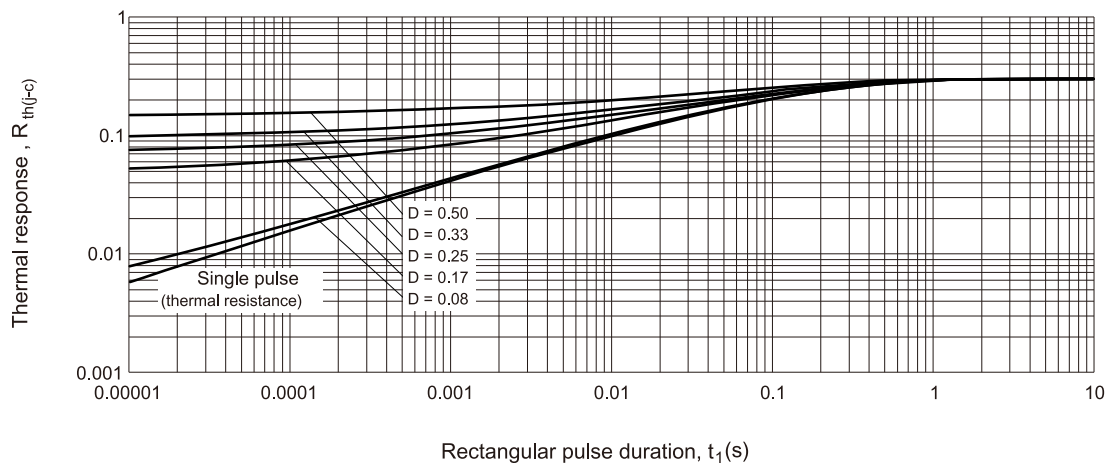


**Fig.9-2 Maximum thermal impedance  $R_{th(j-c)}$  characteristics (per leg, for TO-244M insulated)**

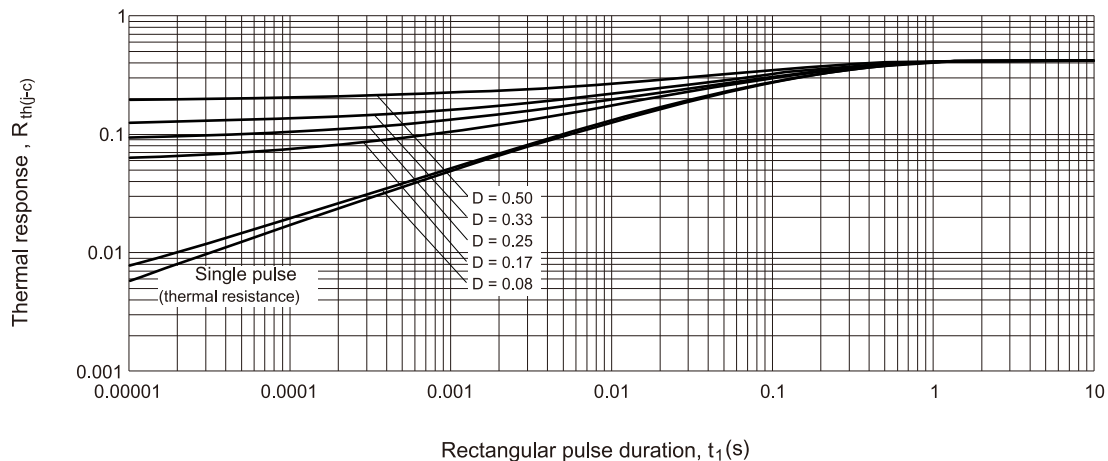


**Fig.10 Reverse recovery parameter test circuit**

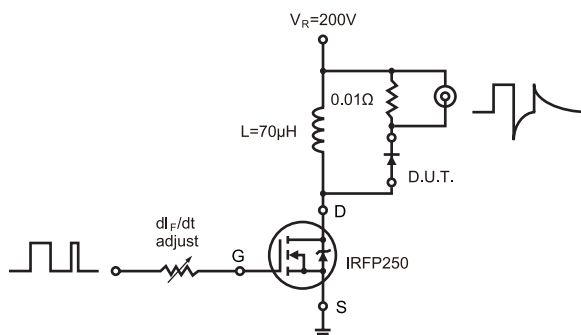

**Fig.11 Reverse recovery waveform and definitions**

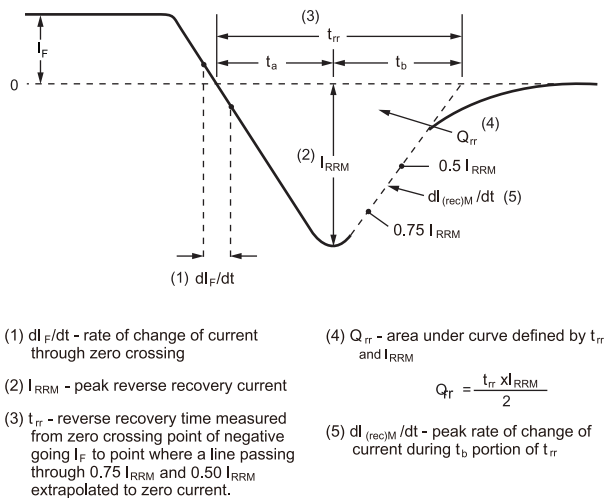

**Fig.12 Avalanche test circuit and waveforms**

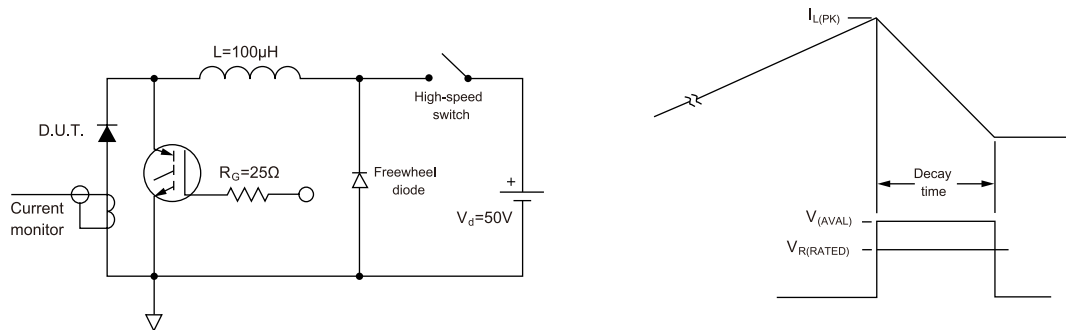

## TO-244M (Non-Insulated)

