


Three-Phase Bridge Rectifier, 100A


MTP10008 Thru MTP10018

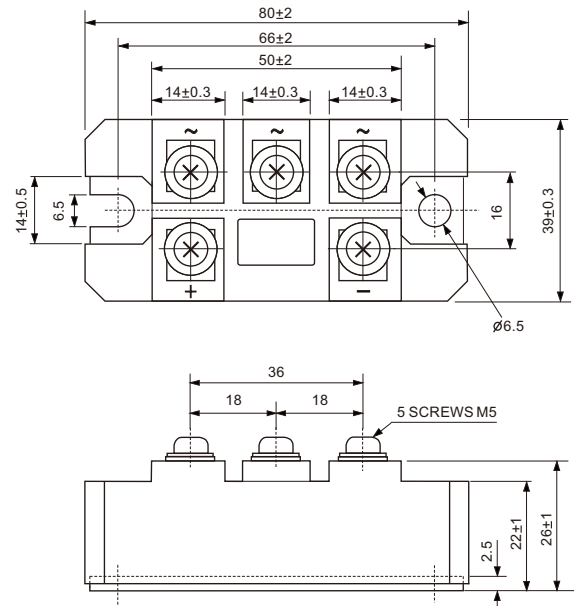

All dimensions in millimeters

FEATURES

- UL recognition file number E320098
- Typical IR less than $2.0 \mu\text{A}$
- High surge current capability
- Low thermal resistance
- Compliant to RoHS
- Isolation voltage up to 2500V



TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for big power supply, field supply for DC motor, industrial automation applications.

ADVANTAGE

- International standard package
- Epoxy meets UL 94 V-O flammability rating
- Small volume, light weight
- Small thermal resistance
- **Weight:** 195g (6.9 ozs)

PRIMARY CHARACTERISTICS

$I_{F(AV)}$	100A
V_{RRM}	800V to 1800V
I_{FSM}	1200A
I_R	$20 \mu\text{A}$
V_F	1.3V
$T_{J \text{ max.}}$	150°C

MAJOR RATINGS AND CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	MTP100					UNIT
		08	10	12	16	18	
Maximum repetitive peak reverse voltage	V_{RRM}	800	1000	1200	1600	1800	V
Peak reverse non-repetitive voltage	V_{RSM}	900	1100	1300	1700	1900	V
Maximum DC blocking voltage	V_{DC}	800	1000	1200	1600	1800	V
Maximum average forward rectified output current	$I_{F(AV)}$	100					A
Peak forward surge current single sine-wave superimposed on rated load	I_{FSM}	1200					A
Rating (non-repetitive, for t greater than 1 ms and less than 10 ms) for fusing	I^2t	7200					A ² s
RMS isolation voltage from case to leads	V_{ISO}	2500					V
Operating junction storage temperature range	T_J	-40 to 150					°C
Storage temperature range	T_{STG}	-40 to 125					°C

ELECTRICAL CHARACTERISTICS (T _A = 25°C unless otherwise noted)								
PARAMETER	TEST CONDITIONS	SYMBOL	MTP100					UNIT
			08	10	12	16	18	
Maximum instantaneous forward drop per diode	I _F = 100A	V _F	1.3					V
Maximum reverse DC current at rated DC blocking voltage per diod	T _A = 25°C	I _R	20					µA
	T _A = 150°C		5000					

THERMAL AND MECHANICAC (T _A = 25°C unless otherwise noted)								
PARAMETER	TEST CONDITIONS	SYMBOL	MTP100					UNIT
			08	10	12	16	18	
Typical thermal resistance junction to case	Single-side heat dissipation, sine half wave	R _{θJC} ⁽¹⁾	0.20					°C/W
Mounting torque to heatsink M6 to terminals M5 ± 10 %	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.		4					Nm
			4					
Approximate weight			195					g

Notes

- (1) With heatsink, single side heat dissipation, half sine wave.
(2) M6 screw.

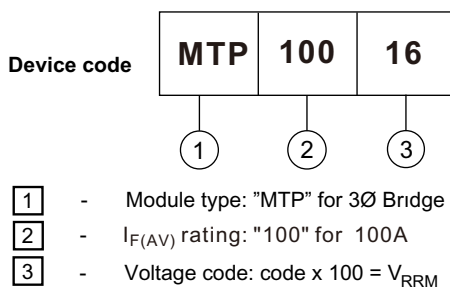


Fig.1 Forward characteristic

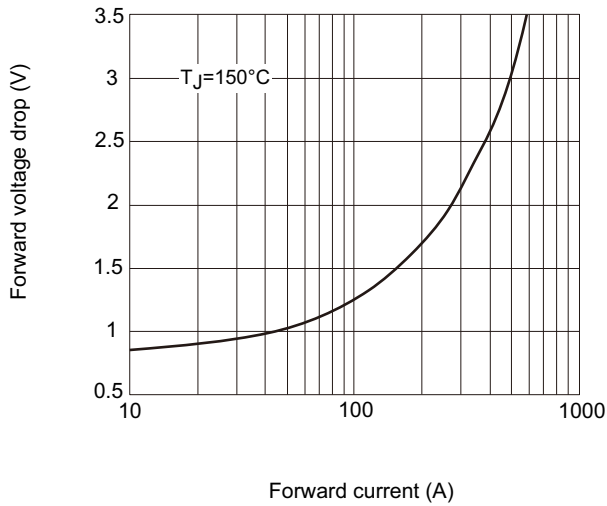


Fig.2 Thermal Impedance (junction to case)

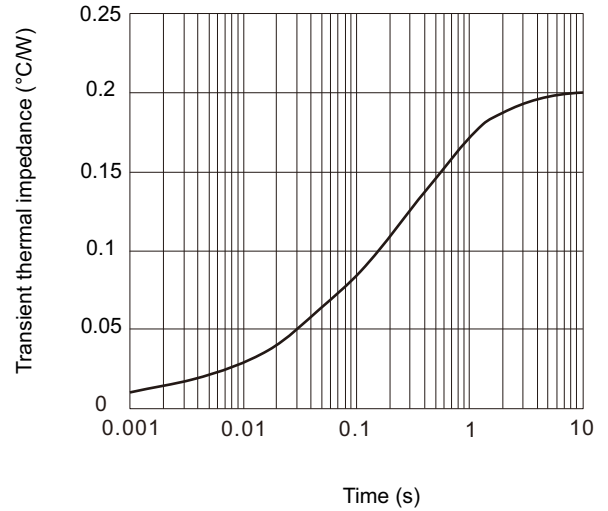


Fig.3 Power dissipation vs. output current

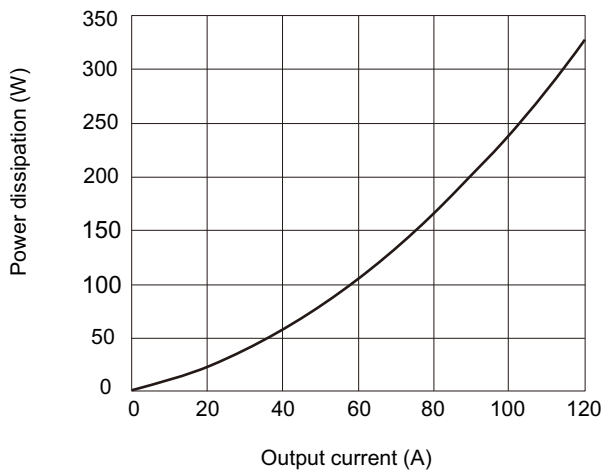


Fig.4 Case temperature vs. output current

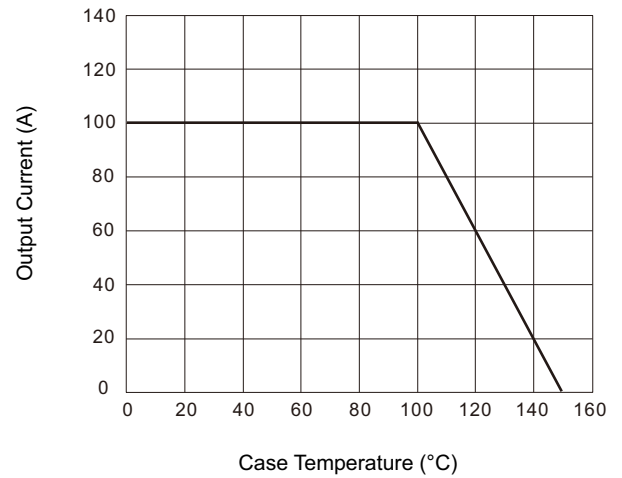


Fig.5 Forward surge current vs. cycle

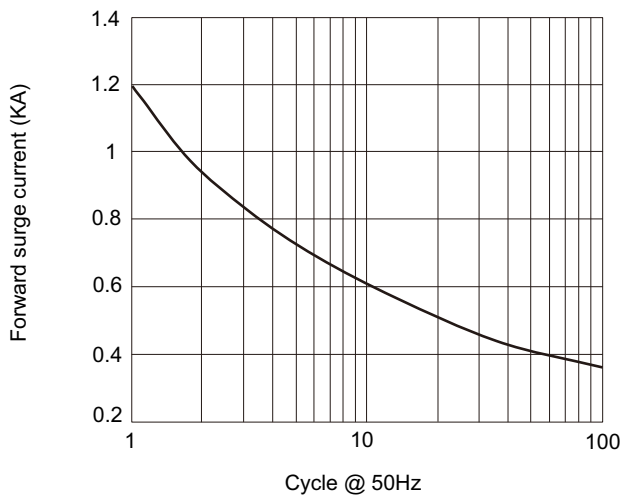


Fig.6 I^2t characteristic

